


# Travel Industry Products

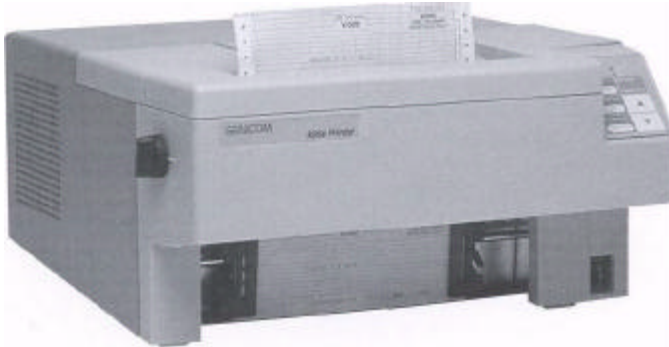

*Low-cost solutions for your  
travel document needs*

## IER

### 895e Printer

#### **Low-Cost Travel Document Solution.**

- Cost-effective printing for low- to medium-volume environments.
- High reliability keeps your printing costs down.
- Low-cost consumables.

#### **Wide Range of Documents.**

- TAT coupons.
- Nonmagnetic ATB coupons.
- Itineraries and invoices.
- Other general-purpose documents.

#### **Hard-Working Features.**

- Coupon burster to automatically separate ATB forms.
- Downloadable firmware.
- Remote status reporting.
- Remote configuration.

#### **Plus These Important Options.**

- Bar code scanner allows capture of bar coded stock control numbers from either TAT or ATB coupons.
- Stacker I-output stacking of up to 65 coupons.

---

#### **Typical Applications**

- Low- to medium-volume travel agencies and airports
- Travel-related documents
- General-purpose documents



# IER 895e

## Printing Capabilities

*Print Head:* 300 million character rating;  
600,000 coupon rating (assumes  
500 characters per ATB coupon, single  
pass, draft mode)

*Print Speeds:*  
300 cps at 10 and 12 cpi draft  
mode

*Font:* OCR

*Print Modes:* Draft, enhanced, double  
strike

*Print Pitches:* 5,6,8,3, 10, 12, and  
16.7 cpi

## Document Handling

Handles most 6-part itineraries (within IER  
specifications)

Handles 9-part TAT (1072) stock (double  
strike may be required)

*Coupon Burster:* Automatically separates  
ATB forms (ATB stock 1186 to  
IER specifications)

*Adjustable Tractors:* 3.5" to 9.5" wide  
forms

Front bottom-feed paper path

Automatic paper loading and parking

Zero-inch tear-off

Paper Slew: 7.0 ips

*Optional:* Stand and paper basket

## Interfaces and Connectivity

Serial and parallel

*Input Buffer:* 19K, 6K or 256 Byte  
(selectable)

*Optional:* Current loop and EIA RS-422

## Physical

*Size:* (HxWxD): 9.0 x 17.7 x 17.7 in.  
(228.6 x 449.6 x 449.6 mm)

*Weight:* (without options) 52 lbs (23.6 kg)

*Acoustics:* Operating - less than 65 dBA

## Operating Environment

*Voltage:*

U.S. domestic units: 120 VAC, 60 Hz

International units: 220 to 240 VAC, 50  
Hz

*Power Consumption:*

Operating: 120 watts maximum

Standby: 40 watts maximum

*Operating Temperature:* 5° to 40° C

*Operating Relative Humidity:* 10% to 90%  
without condensation

*Operating Altitude:* 7,000 feet

## Consumables

Carbonless black matrix ribbon

## Regulatory Agency Approvals

FCC Part 15 Level A-Verified  
UL 1950-Listed

CSA 950-Certified

Radio Interference Regulation CRC  
c. 1374 Class A-Verified

EN60950/IEC 950-Certified

VDE0878, A-Verified Factory ISO  
9002 Registered UL and BSI

## Options

Stand

Basket

Bar code scanner

Stacker I - Up to 65 coupons

For more information contact:

Lake Erie Systems & Services, Inc.  
5321 Buffalo Road  
Erie PA 16510  
Phone: 814-898-0704 Fax: 814-899-1384  
[www.fastprinters.com](http://www.fastprinters.com)  
[travel@lkerie.com](mailto:travel@lkerie.com)

