

Lexmark C780n



LEXMARK[™]

Lexmark C780n

The network-ready Lexmark C780n delivers high-quality output in 4800 Color Quality mode at print speeds of up to 35 ppm black or 31 ppm color.



Lexmark C780n, C780dn, C780dtn

In the Box

Lexmark C780n

- Lexmark C780n Printer
- 6,000-page Cyan, Magenta, Yellow and Black Return Program Print Cartridges¹
- Power Cord
- Software and Documentation CD

Lexmark C780dn

- Lexmark C780n + Automatic two-sided printing

Lexmark C780dtn

- Lexmark C780dn + 500-sheet drawer

Product Specifications

Part Number	C780n: 10Z0200 (Canada: 10Z0203), C780dn: 10Z0201 (Canada: 10Z0204), C780dtn: 10Z0202 (Canada: 10Z0205)
Product Class	Medium workgroup color laser printer
Speed	Black: Up to 35 ppm; Color: Up to 31 ppm
Time to First Page	Black: As fast as 11 seconds; Color: As fast as 13 seconds
Print Resolution	1200 x 1200 dpi; 4800 Color Quality
Processor	800 MHz
Memory (std./max.)	256MB/768MB
Connectivity	
Standard	Ethernet, USB, USB Direct Interface, 1 internal solutions port (ISP)
Optional	Serial, Parallel, Wireless, Gigabit Ethernet, Fiber Optic
Network Mgmt Utility	MarkVision Professional
Printer Languages	PostScript 3 and PCL 6 emulations, PPDS Migration Tool
Direct Print Formats	PDF v1.5, GIF, PNG, BMP, PCX, DCX, JPEG, TIFF, HTML 4.0
Fonts	PCL: 89 scalable, 2 bitmapped; PostScript: 158 scalable; PPDS: 39 scalable, 5 bitmapped
Operating Systems	Windows, Linux, UNIX, Mac, NetWare and OS/400
Acoustics	Printing: 52 dBA; Idle: 30 dBA
Size (WxDxH)	C780n: 23.8 in. x 18.5 in. x 20.8 in. (604.5 mm x 469.9 mm x 528.3 mm); C780dn: 23.8 in. x 18.5 in. x 24.3 in. (604.5 mm x 469.9 mm x 617.2 mm); C780dtn: 23.8 in. x 18.5 in. x 28.9 in. (604.5 mm x 469.9 mm x 734.1 mm)
Weight	C780n: 105 lb. (47.7 kg); C780dn: 118.5 lb. (53.8 kg); C780dtn: 132 lb. (60 kg)
Duty Cycle	Up to 120,000 pages per month (Maximum one-time monthly usage)

Media Specifications


Paper Capacity (sheets)	
Standard	C780n, C780dn: Input: 600; Output: 250
Maximum	C780dtn: Input: 1,100; Output: 250
	Input: 1,100; Output: 250
Paper Sources	
Standard	C780n, C780dn: Input: 2; Output: 1
Maximum	C780dtn: Input: 3; Output: 1
	Input: 3; Output: 1
Media Information	
Types	Plain paper, recycled paper, card stock, transparencies, envelopes, vinyl labels, paper labels, polyester labels, dual-web labels, integrated labels
Size	Letter, A4, A5, JIS B5, statement, folio, legal, executive, universal (3 x 5 in. to 9.01 x 14 in.), envelopes (7 ³ / ₄ , 9, 10, DL, C5, B5)
Weight	Plain paper: 16 to 47 lb. (60 to 176 g/m ²); Card stock: up to 110 lb. (199 g/m ²); Labels: 48-92 lb. (180-300 g/m ²)

Shipping Dimensions

Lexmark C780n	31.3 in. x 25.6 in. x 31.9 in. 150 lb.
Lexmark C780dn	43.3 in. x 28.5 in. x 37.2 in. 200.6 lb.
Lexmark C780dtn	52 in. x 28.5 in. x 37.2 in. 222.1 lb.

Part Numbers

Supplies	10,000-page Black High Yield Return Program Print Cartridge ¹	C780H1KG
	10,000-page Cyan High Yield Return Program Print Cartridge ¹	C780H1CG
	10,000-page Magenta High Yield Return Program Print Cartridge ¹	C780H1MG
	10,000-page Yellow High Yield Return Program Print Cartridge ¹	C780H1YG
	10,000-page Black High Yield Print Cartridge ¹	C780H2KG
	10,000-page Cyan High Yield Print Cartridge ¹	C780H2CG
	10,000-page Magenta High Yield Print Cartridge ¹	C780H2MG
	10,000-page Yellow High Yield Print Cartridge ¹	C780H2YG
	6,000-page Black Return Program Print Cartridge ¹	C780A1KG
	6,000-page Cyan Return Program Print Cartridge ¹	C780A1CG
	6,000-page Magenta Return Program Print Cartridge ¹	C780A1MG
	6,000-page Yellow Return Program Print Cartridge ¹	C780A1YG
	6,000-page Black Print Cartridge ¹	C780A2KG
	6,000-page Cyan Print Cartridge ¹	C780A2CG
	6,000-page Magenta Print Cartridge ¹	C780A2MG
	6,000-page Yellow Print Cartridge ¹	C780A2YG
	Toner Waste Container	10B3100
	Routine Maintenance Items:	
	ITU Maintenance Kit with Transfer Roll	40X1826
Fuser Maintenance Kit	40X1831	
Memory/Flash Options	128MB SDRAM	13N1523
	256MB SDRAM	13N1524
	512MB SDRAM	13N1526
	32MB Flash Card	1021208
	64MB Flash Card	1021209
	40+GB Hard Disk	13N1530
Warranty	1-year Onsite Repair	Base
	1-year Onsite Repair extended warranty	2349392
	2-year Onsite Repair extended warranty	2349393
	3-year Onsite Repair extended warranty	2349394

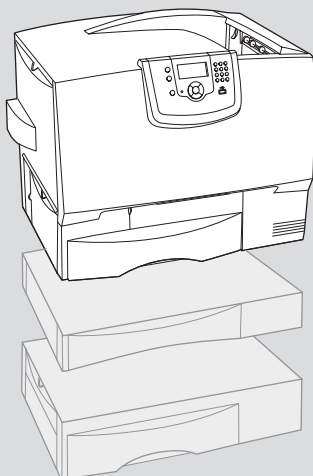

—100-sheet Multiurpose Feeder (standard)

—500-sheet Drawer (standard)

—Duplex Unit (standard on dn & dtn, 20B2400)

—500-Sheet Drawer (standard on dtn, 20B2300)

Options Not Pictured

500-sheet Tray	20B2373
Printer Base	16N1708

¹ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

Additional Part Numbers

Solutions	Traditional Chinese Font Card	1021242
	Simplified Chinese Font Card	1021241
	Japanese Font Card	1021243
	Korean Font Card	1021240
	Forms Card	10Z0402
	Card for PRESCRIBE	10Z0404
	PrintCryption™ Card	10Z0403
	Card for IPDS and SCS/Tne	10Z0401
	Bar Code Card	10Z0400
Connectivity	Internal Print Servers ¹	
	MarkNet™ N8020 Gigabit Ethernet	14S0200
	MarkNet N8030 Fiber Ethernet	14S0220
	MarkNet N8050 802.11g Wireless	14S0165
	External Print Servers ²	
	MarkNet N7020e Gigabit Ethernet Print Server	14T0220
	N4050e 802.11g Wireless	14T0145
	Local Connections	
RS-232C Serial Interface Card	1021092	
Parallel 1284-B Interface Card	1021091	
Cables	6-foot USB Cable	1021294
	10-foot Parallel Cable	1021231
Media	Glossy Paper (letter, 200 sheets)	12A5950
	Professional Color Laser Transparencies (letter, 50 sheets)	12A8240

Terms & Conditions

Lexmark, MarkNet and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PrintCryption is a trademark of Lexmark International, Inc. PCL is a registered trademark of Hewlett Packard Company. All other trademarks are the property of their respective owners. © 2007 Lexmark International, Inc. All rights reserved.

71K1212

¹ Use of Internal Print Server disables network card resident in Printer.
² Requires USB Connection Requires USB Connection