

Lexmark X340n and X342n



The Lexmark X340n and X342n
provide copy, fax and print capabilities
with local or network color scanning.

LEXMARKTM

Lexmark X340n and X342n



- Up to 27 ppm laser All-in-One for demanding small workgroups
- Integrated design and small footprint for space-limited areas
- Easy-to-use back-lit operator panel
- 50-sheet ADF standard for multi-page faxing and copying

Lexmark X340n, X342n


Product Specifications

Part Number	X340n (20D0219), X342n (20D0001)
Product Class	Desktop/small workgroup laser All-in-One
Print Speed	Up to 27 ppm
Print Resolution	600 x 600 dpi
Time to First Page	Print: As Fast as 10 seconds
Processor	150 MHz
Memory	64MB
Connectivity	
Standard	Ethernet, USB
Optional	Wireless, Gigabit Ethernet
Operating Systems	Microsoft Windows
Printer Language	PCL 6 emulation
Fonts	PCL 12 Scalable, 1 Bitmapped
Copy	Up to 27 ppm, copy quantity 1 to 99, reduce/enlarge 25% to 400%; paper saver 2-up or 4-up, collate, darkness adjustment
Fax	Speed: 33.6 Kbps; Group fax, delayed send, broadcast; Darkness adjustment; Fax confirmation sheet with reduced first page; approximately 3 seconds per page; 200 x 100 dpi, 200 x 200 dpi, 300 x 300 dpi
Scan	Color and black flatbed scanner with 50-sheet ADF; 600 x 600 dpi optical resolution; ADF scan size: 8.5" x 14"; ADF media weights: 14 lb. minimum, 32 lb. maximum; ADF speed: 15 spm black, 7 spm color; scan to PC, TWAIN; Image file formats: TIFF, JPEG, PDF and BMP
Size (WxDxH)	20.8 in. x 15.5 in. x 20.5 in. (530 mm x 394 mm x 521 mm)
Weight	36 lb. (16.33 kg)
Acoustics	51 dBA printing, 52 dBA copying; 49 dBA scanning, 27 dBA idle
Duty Cycle	Up to 15,000 pages per month
Base Warranty	1-year Onsite Repair

Media Specifications

Paper Capacity (sheets)	
Standard Input	250 or single-sheet bypass feeder
Maximum Input	800 (250 + 550)
Standard Output	150 Top (1 Rear)
Maximum Output	150
Paper Sources	
Standard Input	2
Maximum Input	3
Standard Output	1 Top, 1 Rear
Maximum Output	1 Top, 1 Rear
Media Types	Paper, envelopes, card stock, paper labels, transparencies
Media Sizes	Letter, legal, A4, A5, JIS B5, Executive, Folio, Statement, Envelopes (7 3/4, 9, 10, DL, C5, B5)
Media Weights	Plain paper: 16 to 24 lb. (60 to 90 g/m ²); Card stock: up to 90 lb. Index (163 g/m ²)

In the Box



Lexmark X340n

- Lexmark X340n
- 2500-page starter toner cartridge
- Photoconductor Kit
- Setup sheet
- Software and Documentation CD
- Operator Panel Overlay
- RJ-11 Cable
- Power Cord

Lexmark X342n

- Lexmark X342n
- 2500-page starter toner cartridge
- Photoconductor Kit
- Setup sheet
- Software and Documentation CD
- Operator Panel Overlay
- RJ-11 Cable
- Power Cord


Lexmark X340n and X342n

Supplies & Accessories

Part Number

Supplies		Part Number
	2,500-page Return Program Toner Cartridge ¹	X340A11G
	2,500-page Toner Cartridge ¹	X340A21G
	6,000-page Return Program Toner Cartridge (X342n only) ¹	X340H11G
	6,000-page Toner Cartridge (X342n only) ¹	X340H21G
	Photoconductor Kit	X340H22G

Paper Handling Options

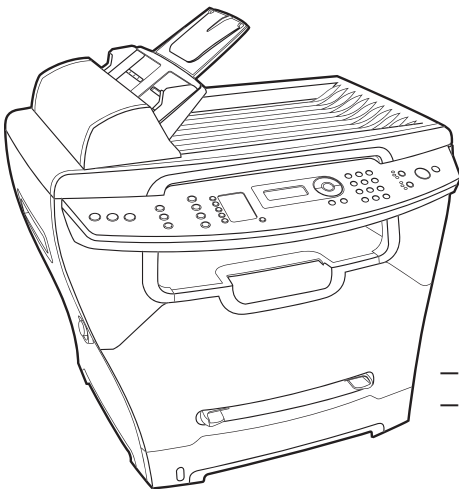

- Single-sheet Bypass Feeder (standard)
- 250-sheet Drawer (standard)

Additional Information

¹ Declared yield value in accordance with ISO/IEC 19752

Options not pictured:
550-Sheet Drawer (28S0803)

Lexmark X340n and X342n

Additional Accessories

Connectivity	MarkNet N7000 Series External Print Servers ¹	
	N7020e Gigabit Ethernet	14T0220
	Wireless	
	N4050e 802.11g Print Server ¹	14T0145
	802.11g Wireless Print Adapter ²	1010042
Cable Options	6-foot USB cable	1021294
Print Media	Transparencies – letter (50 sheets)	70X7240

¹ Requires USB connection

² Requires Ethernet connection

