

Lexmark T430



- Compact, low-profile design ideal for cramped work areas
- First page prints in 8 seconds
- Operator panel is back lit and easy to read
- Save time, lower network traffic using direct PDF printing
- Secure confidential documents with 'Print and Hold' feature

LEXMARK™

Lexmark T430

- Compact, low-profile is ideal for cramped work areas
- Blazing 8-second time to first page
- Automatic two-sided printing models available
- Ideal for small business networks



Lexmark T430, T430d, T430dn


Product Specifications

Part Number	US/Canada: 26H0400 (T430); 26H0100 (T430d); 26H0200 (T430dn)
Product Class	Desktop/small workgroup laser printer
Speed	Up to 32 ppm
Resolution	1200 x 1200 dpi, 2400 image quality, 1200 image quality, 600 x 600 dpi
Time to First Page	8 seconds (standby mode); 9.8 seconds (Power Saver mode)
Processor	366 MHz
Memory (std./max.)	T430, T430d: 32MB/288MB T430dn: 64MB/320MB
Connectivity	
Standard	T430, T430d: Parallel, USB T430dn: Parallel, USB, Ethernet
Optional	T430, T430d: Token-Ring, Ethernet, Serial, Wireless T430dn: Token-Ring, Serial, Wireless
Network Mgmt. Utility	MarkVision Professional
Operating Systems	Windows, Linux, UNIX, Mac and NetWare. For a complete list, visit www.lexmark.com.
Printer Languages	PostScript 3 and PCL 6 emulations, PPDS Migration Tool and direct PDF v1.2/v1.3 printing
Fonts	PCL: 89 scalable, 2 bitmapped; Includes OCR-A & OCR-B, Code 3 of 9 bar codes; PostScript: 91 scalable; PPDS: 39 scalable and 5 bitmapped
Size (WxDxH)	16 in. x 16.7 in. x 10 in. (406.4 mm x 424.18 mm x 254.0 mm)
Weight	31.5 lb. (14.29 kg)
Acoustics	55 dBA printing, background noise only idle
Duty Cycle	Up to 65,000 pages per month
Warranty	1 year LexExpress SM

Media Specifications

Paper Capacity (sheets)	
Standard Input	350 (250-sheet tray, 100-sheet MPT)
Maximum Input	1,100 (500-sheet tray, two 250-sheet trays, 100-sheet MPT)
Output	170 (150 top or 20 rear)
Paper Sources	
Standard Input	2
Maximum Input	4
Output	1 top or 1 rear
Media Types	Plain paper, card stock, envelopes, transparencies and paper labels
Media Sizes	Letter, legal, executive, folio, statement, A4, A5, JIS B5, universal (3 x 5 in. to 8.5 x 14 in.), and envelopes (7 ³ / ₄ , 9, 10, DL, C5, B5)
Media Weights	Plain paper: 16 to 43 lb. (60 to 163 g/m ²), Card stock: up to 90 lb. Index (163 g/m ²)

In the Box



Lexmark T430

- Lexmark T430 Printer
- 6000-page Return Program Print Cartridge
- Power Cord
- Publications CD
- Drivers, MarkVision and Utilities CD

Lexmark T430d

- Lexmark T430
- PLUS**
- Automatic two-sided printing

Lexmark T430dn


- Lexmark T430d
- PLUS**
- Additional 32MB memory (64MB total)
- Ethernet

Lexmark T430

Supplies & Accessories

Supplies¹	12,000-page High Yield Return Program Print Cartridge	12A8425
	12,000-page High Yield Print Cartridge	12A8325
	6,000-page Return Program Print Cartridge	12A8420
	6,000-page Print Cartridge	12A8320
Memory/Flash Options		
	16MB SDRAM	16H0056
	32MB SDRAM	16H0057
	64MB SDRAM	16H0058
	128MB SDRAM	16H0059
	256MB SDRAM	13H0730
	16MB Flash Memory Card ²	11K4616
	32MB Flash Memory Card ²	11K4632

Paper Handling Options²

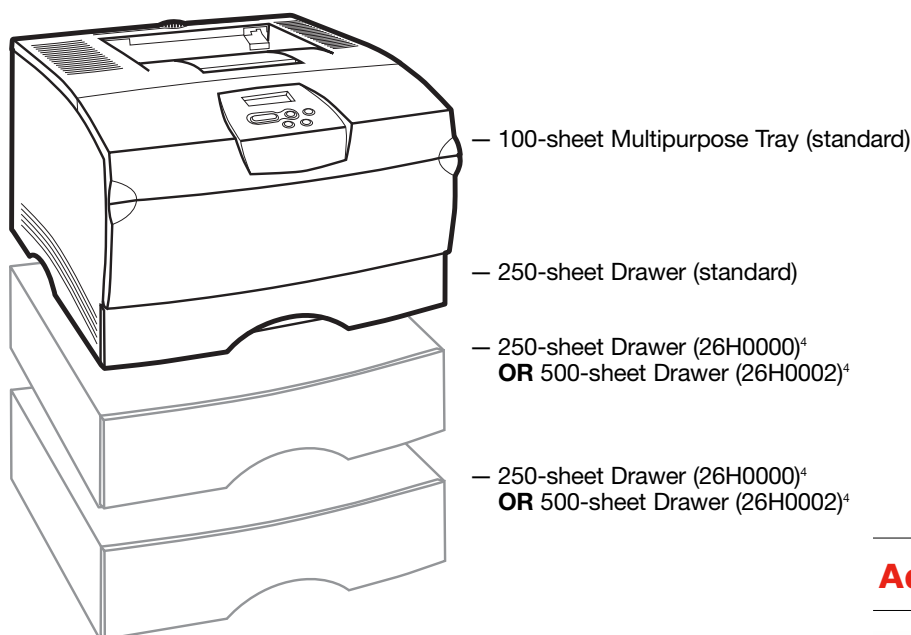

Options not pictured:

250-sheet Primary Tray (26H0350)⁵
250-sheet Tray (26H0001)
500-sheet Tray (26H0003)

Additional Information

¹ Declared standard page yield value in accordance with ISO/IEC 19752.

² One flash memory slot and one application slot available

³ Displays all available options for base model

⁴ Optional drawer configurations:

- One 250-sheet drawer OR
- One 500-sheet drawer OR
- One 250-sheet drawer and one 500-sheet drawer OR
- Two 250-sheet drawers

⁵ For use with standard 250-sheet drawer only

Lexmark T430

Additional Accessories

Paper Handling Options	250-sheet Drawer	26H0000
	500-sheet Drawer	26H0002
	250-sheet Primary Tray	26H0350
	250-sheet Tray	26H0001
	500-sheet Tray	26H0003
Media	Transparencies (Letter)	70X7240
Optra Forms Solutions	Optra Forms Director (V1.0)	11N0052
	Optra Forms Software (V4.3c)	11N0040
	Optra Forms Manager	11N0056
	Optra Forms 16MB Flash Card	10G0747
	Optra Forms 32MB Flash Card	10G0748
	Optra Forms 2-Key Security	43H5841
	Optra Forms 3-Key Security	43H5842
Font Options	Korean Font Card	10G0743
	Simplified Chinese Font Card	10G0744
	Traditional Chinese Font Card	10G0745
	Japanese Font Card	10G0746
Application Card Solutions	ImageQuick Card	26H0394
	Bar Code Card	26H0395
	Card for IPDS and SCS/TNe	26H0396
	Lexmark PrintCryption Card	26H0397
	Lexmark Card for PRESCRIBE	26H0398
Connectivity	MarkNet X2011e Ethernet 10/100BaseTX	46D0060
	MarkNet X2012e Ethernet 10/100BaseTX/10Base2	46D0040
	MarkNet X2031e Ethernet 10/100BaseTX	46D0020
	MarkNet X2030t Token-Ring	46D0000
	Lexmark N4000e Print Server	14T0030
	802.11g Wireless Print Adapter	1010042
	Lexmark N4050e 802.11g Wireless Print Server	14T0145
Adapters	External Serial Adapter	1368705
Cables	10-foot Parallel Printer Cable	1329605
	6-foot USB Printer Cable	12A2405
	50-foot Serial Printer Cable	1038693

Lexmark, Lexmark with diamond design and PrintCryption are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. LexExpressSM is a service mark of Lexmark International, Inc., registered in the United States and/or other countries. Optra Forms is a trademark of Lexmark International, Inc. Mac OS and the Mac logo are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. PCL is a registered trademark of Hewlett-Packard Company. The USB-IF logos are trademarks of Universal Serial Bus Implementers Forum, Inc. All other trademarks are the property of their respective owners. © 2004. Lexmark International, Inc. All rights reserved.

71K6540



Printed on recycled paper.

