

Lexmark C920



- **Fast 32 ppm color printing is ideal for departments**
- **Extensive range of paper-handling options supports media from 3 x 5 in. cards to 11.7 x 48 in. banners**
- **Control the cost of color and usage with Lexmark Color Care Technology**
- **Finish your professional documents with optional hole punching, stapling and collation**

LEXMARKTM

Lexmark C920



- ImageQuick™ standard for fast graphic printing
- Bookmark capability for easy on-demand printing from the Internet or intranet
- USB Direct interface for quick walk-up printing from USB flash memory drives
- Up to 200,000 page per month duty cycle

Lexmark C920, C920n, C920dn, C920dtn


Product Specifications

Part Number	US/Canada: 13N1000 (C920), 13N1100 (C920n), 13N1200 (C920dn), 13N1300 (C920dtn)
Product Class	Departmental color printer; Calibrated for PANTONE™ solid color simulation
Speed	Black: Up to 36 ppm; Color: Up to 32 ppm
Resolution	Up to 2400 image quality
Time to First Page	Black: As fast as 9.5 seconds; Color: As fast as 13.5 seconds
Processor	1 GHz
Memory (std./max.)	C920, C920n, C920dn: 256MB/1GB; C920dtn: 512MB/1GB
Connectivity	
Standard	C920: Parallel, USB, USB Direct Interface, 1 ISP C920n, C920dn, C920dtn: Ethernet, Parallel, USB, USB Direct Interface, 1 ISP
Optional	C920: Ethernet, Gigabit Ethernet, Serial, Token-Ring, Coax/Twinax, Wireless, Fiber Optic C920n, C920dn, C920dtn: Gigabit Ethernet, Serial, Token-Ring, Coax/Twinax, Wireless, Fiber Optic
Network Mgmt. Utility	MarkVision Professional
Operating Systems	Windows, Linux, UNIX, Mac, NetWare and OS/400 For a complete list, visit www.lexmark.com.
Printer Languages	PostScript 3 and PCL 6 emulations, PPDS Migration Tool
Direct Print Formats	Base: PDF v1.5; Network: PDF v1.5, JPEG, JPG, TIFF, GIF, PNG, BMP, PCX and DCX
Fonts	PCL 6: 89 scalable, 2 bitmapped, includes OCR-A, OCR-B and Code 3 of 9 bar code fonts; PostScript: 158 scalable; PPDS: 39 scalable, 5 bitmapped
Size (WxDxH)	C920, C920n, C920dn: 27.4 in. x 27.8 in. x 20.2 in. (695 mm x 705 mm x 512 mm) C920dtn: 27.4 in. x 27.8 in. x 25.2 in. (695 mm x 705 mm x 641 mm)
Weight	C920, C920n: 177 lb. (80.5 kg) C920dn: 190 lb. (86.4 kg) C920dtn: 231 lb. (104.9 kg)
Acoustics	53 dBA color printing; 55 dBA black printing; 45 dBA ready mode
Duty Cycle	Up to 200,000 pages per month
Warranty	1-year LexOnSite Repair

Media Specifications

Paper Capacity (sheets)	C920, C920n, C920dn	C920dtn
Standard Input	650 (550+100 MPT)	1,200 (550+550+100 MPT)
Maximum Input	5,300	5,300
Standard Output	650 (550 top + 100 side)	650 (550 top + 100 side)
Maximum Output	1,650	1,650
Paper Sources	C920, C920n, C920dn	C920dtn
Standard Input	2	3
Maximum Input	6	6
Standard Output	2	2
Maximum Output	3	3
Media Types	Plain paper, card stock, transparencies, envelopes, glossy paper, paper labels, vinyl labels, banner paper	
Media Sizes	Letter, A4, A5, JIS B5, JIS B4, legal, executive, tabloid, A3, universal (2.75 x 5 in. to 9.01 x 14 in.), banner (Up to 11.7 x 48 in.), envelopes (7 3/4, 9, 10, DL, C4, C5, B5, other)	
Media Weights	Plain paper; 20-28 lb. (75-105 g/m ²); Up to 102 lb. Index (216 g/m ²)	

In the Box



Lexmark C920

- Lexmark C920 Printer
- 8,000-page Cyan, Magenta, Yellow and Black Starter Toner Cartridges¹
- 28,000-page Color Photoconductor Kit¹
- 28,000-page Black Photoconductor¹
- Power Cord
- Publications CD
- Drivers and Utilities CD

Lexmark C920n

- Lexmark T920 **PLUS**
- Ethernet

Lexmark C920dn

- Lexmark C920n **PLUS**
- Duplex

Lexmark C920dtn

- Lexmark C920dn **PLUS**
- 256MB Memory (512MB total)
- 550-sheet drawer


COLOR
CARE
Technology

Lexmark C920

Supplies & Accessories

Supplies	14,000-page Cyan Toner Cartridge ¹	C9202CH
	14,000-page Magenta Print Cartridge ¹	C9202MH
	14,000-page Yellow Print Cartridge ¹	C9202YH
	15,000-page Black Print Cartridge ¹	C9202KH
	Color Photodeveloper Kit (Up to 28,000 pages)	12N0772
	Black Photodeveloper (Up to 28,000 pages)	12N0773
	Oil Coating Roller	C92035X
	Staple Cartridges	11K3188
	Routine Maintenance Items:	
	Transfer Belt	40X1251
Low (120) Volt Fuser Unit	56P2650	
Memory Options	128MB DDR RAM	13N1523
	256MB DDR RAM	13N1524
	512MB DDR RAM	13N1525
	32MB Flash Card ²	1021208
	64MB Flash Card ²	1021209
	20+GB Hard Disk	12N1262

Paper Handling Options³

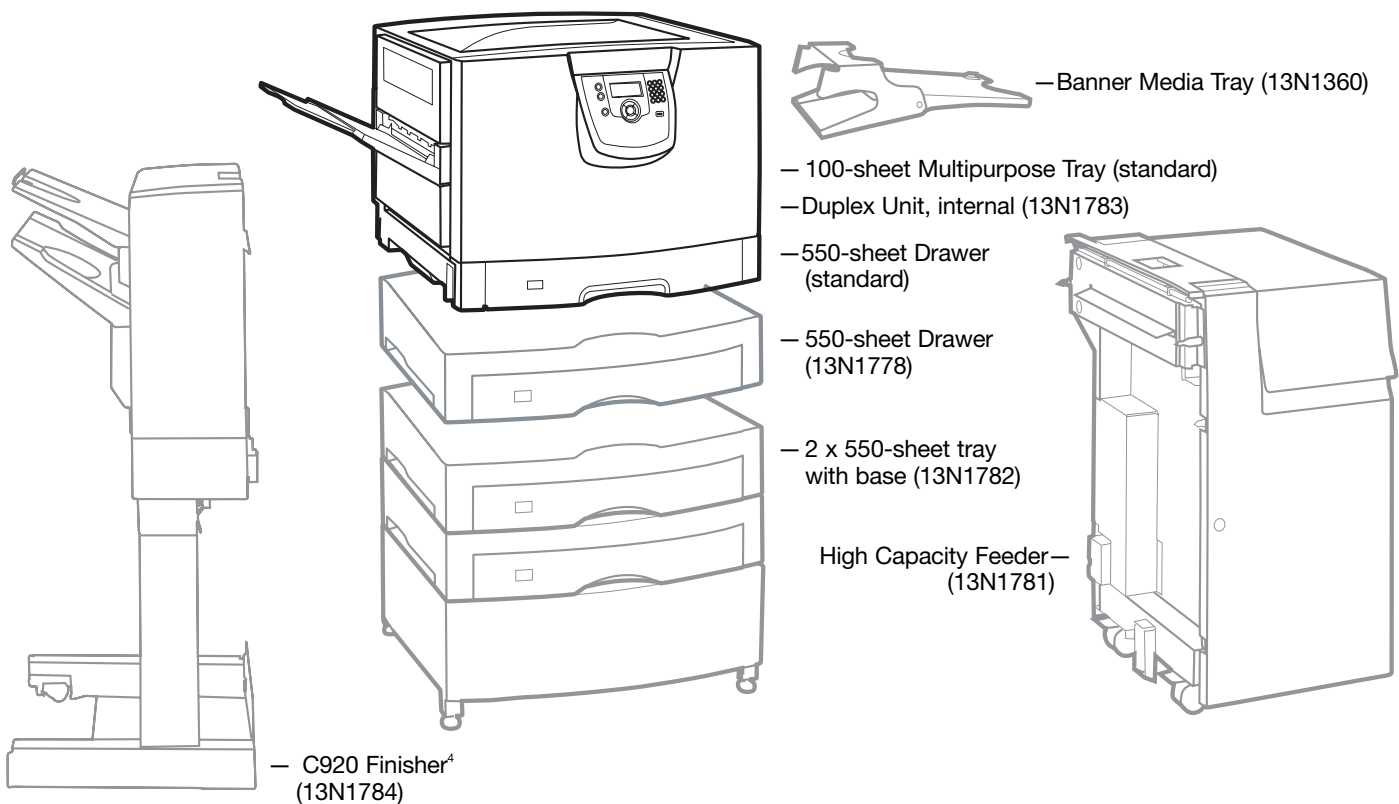

Options not pictured:

C920 Printer Cabinet (13N1786)

C920 Printer Base (13N1787)

Additional Information

¹ Yield up to quoted page volume based on approximately 5% coverage pages per color. Actual number of pages varies based upon customer usage.

² Requires one internal solutions port

³ Displays all available options for **base** model

⁴ Requires one 550-sheet drawer and either a Printer Cabinet or one 2 x 550-sheet drawer with base

Lexmark C920

Additional Accessories

Connectivity	MarkNet X2000 Series External Print Servers ¹	
	X2011e Ethernet 10/100BaseTX	46D0060
	X2012e Ethernet 10/100BaseTX/10Base2	46D0040
	X2031e Ethernet 10/100BaseTX (3 ports)	46D0020
	X2030t Token-Ring (3 ports)	46D0000
	MarkNet N4000 Series External Print Servers ²	
	N4000e Ethernet 10/100BaseTX	14T0030
	MarkNet N8000 Series Internal Print Servers	
	N8000 Fast Ethernet	14S0230
	N8020 Gigabit Ethernet	14S0200
	N8030 Fiber 10/BaseFX	14S0220
	Wireless	
	N8050 802.11g Print Server	14S0165
N4050e 802.11g Print Server ²	14T0145	
802.11g Print Adapter	1010042	
Application Solutions	Bar Code Card	13N1340
	Card for IPDS and SCS/TNe	13N1341
	PrintCryption™ Card	13N1343
	Forms Card – Single Byte	13N1344
	Forms Card – Simplified Chinese	13N1345
	Card for PRESCRIBE	13N1342
	Korean Font Card	1021240
	Simplified Chinese Font Card	1021241
	Traditional Chinese Font Card	1021242
	Japanese Font Card	1021243
Other Attachment Options	1284-B Parallel Card	11K4601
	RS-232C Serial Interface Card	11K4602
	RS-232C/422C External Serial Adapter	1368705
Cable Options	Serial 50-foot Cable	1038693
	Parallel 6-foot 1284-C Cable	11K4078
	Parallel 1284 C-B Adapter	11K4250
	USB 6-foot Cable	12A2405
	Parallel 10-foot high speed bidirectional Cable	1329605
Print Media	Banner Laser Paper	12A7940
	Glossy Laser Paper	12A5950
	Transparencies	12A8240

¹ Requires external parallel connection

² Requires USB connection

Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PrintCryption and ImageQuick are trademarks of Lexmark International, Inc. LexOnSite is a service mark of Lexmark International, Inc. Mac is a trademark of Apple Computer, Inc., registered in the U.S. and other countries. PCL is a registered trademark of Hewlett-Packard Company. The USB-IF logo is a trademark of Universal Serial Bus Implementers Forum, Inc. All other trademarks are the property of their respective owners. © 2005 Lexmark International, Inc. All rights reserved.

71K1140



Printed on recycled paper.

