



# Rock-Solid Performance for High-Volume Forms Printing.



The PACEMARK<sup>®</sup> 4410 is simply the most reliable, powerful and durable forms printer in its class. Stand-alone or shared by a workgroup, this heavy-duty impact printer can tackle your most demanding forms workflow and then some.



The exceptional performance of the PACEMARK 4410 is perfectly suited to applications requiring high volume, including long, unattended print runs, general data processing, invoices, billing and financial statements, inventory reports, banking transaction logs, and accounting reports.

For unsurpassed reliability, the PACEMARK 4410 is rated at 15,000 hours before failure (MTBF) — the equivalent of 7.25 years of 40-hour work weeks! — outperforming its closest competition by 50%.

For strength and stability, the PACEMARK 4410 has a larger, beefier carriage assembly, ensuring optimal print quality. The metal chassis gives

the printer greater rigidity and strength in rugged environments. Even the tear bar is long-lasting metal — for clean, precise cutting.

And ensuring the outstanding performance of the PACEMARK 4410 is an industry-leading on-site warranty: 2 years parts and labor on the printer, and 1 year parts and labor on the printhead.

Powerful? It prints clearly on the last page of a 10-part form, and handles stock that's up to 48% thicker than its competitors can take. It has the horsepower to deliver 300 lines per minute/ 1,066 characters per second in High-Speed Draft mode — and an unmatched speed off the line in its 15 ips feed rate.

As for endurance, the PACEMARK 4410 can consistently turn out 35,000 pages per month — which translates into 3,045,000 pages before failure.

There's no question about it: if you need reliability, power and endurance in a forms printer, the printer you want is the PACEMARK 4410.

Simply the  
most reliable,  
powerful  
and durable  
forms printer  
in its class.



## Convenience and support to count on.

Everything about the PACEMARK 4410 says "convenience" — right down to the 2-line, back-lit LCD display panel. And that extends to the printer's sensor-driven paper handling: stock thickness is read and adjustments made automatically, so there's no need for user intervention — and media moves smoothly through the machine.


Two paper paths (front and rear) let you load two forms simultaneously: continuous-form stock, including single- and multi-part, card stock, envelopes and labels. And the paths can be selected through the printer software that's included or via the front panel.

The stand-alone model of the PACEMARK 4410 is at home in a wide variety of computer

platforms, including Windows NT®, Windows® 98, MS-DOS® and IBM® OS/2®. Or upgrade via internal or external network print servers to support Windows® NT® Workstation, Novell® NetWare®, UNIX®, IBM LANServer® and Microsoft LAN Manager®. Or get your network support out of the box, with the factory-configured model.

If you have a question about your PACEMARK 4410 — 7 days a week, 24 hours a day, 365 days a year — call us at 1-800-OKIDATA (800-654-3282) and talk to a live service expert.

For more information on the PACEMARK 4410 or other OKI printers, visit our web site at [www.okidata.com](http://www.okidata.com). Or, for the OKI dealer nearest you, call 1-800-OKIDATA.

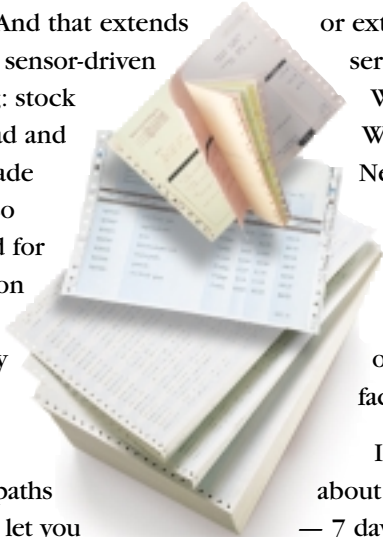

The PACEMARK 4410  
(Shown with optional printer stand.  
For information, call 800-749-2258.)

**To Contact Okidata:**

In USA: 2000 Bishops Gate Blvd.  
Mount Laurel, NJ 08054-4620  
Tel: 800.OKIDATA (800.654.3282)  
Fax: 609.222.5320

In Canada: 2735 Matheson Blvd. East  
Mississauga, Ontario L4W 4M8  
Tel: 905.238.4250  
Fax: 905.238.4421

OKIDATA División Internacional:  
2000 Bishops Gate Blvd.  
Mount Laurel, NJ 08054-4620  
Tel: 609.231.0002  
Fax: 609.222.5071

Web Site: [www.okidata.com](http://www.okidata.com)

# PACEMARK® 4410

## HIGH-SPEED FORMS PRINTER

**Technology, Speed and Print Characteristics**

**Print Method:** Serial Impact Dot Matrix (SIDM)

**Pinhead:** User-replaceable 2 x 9-pin diamond array

**Format:** Wide-carriage (132-column) only

**Print Speed/Character Matrix:**

Mode	NLQ	Utility	HS Draft
Characters per second	200	800	1,066
Characters per inch (HxV)	17 x 13	9 x 7	7 x 7

**Lines per minute:** 300

**Feed Rate:** 15 inches per second (ips)

**Emulation, Interface and Memory**

**Emulations:** Epson® FX, IBM® ProPrinter® III, OKI® MICROLINE® co-resident

**Standard Interfaces:** Centronics® IEEE 1284 bi-directional parallel; RS-232C (supports 38.4K data rates)

**Optional Interfaces:** OkiLAN® 6100e (10/100 Base-T internal network print server; Ethernet® with SNMP support – standard with network-ready model); OkiLAN® 6010e (10 Base-T external network print server)

**Standard Memory:** 512K RAM, 28K Receive buffer (max. 56K in DLL)

**Fonts/Characters**

**NLQ:** Courier, Gothic

**Utility/HSD/SSD:** Gothic

**Scalable (22–216 pt.):** Courier, Gothic

**Code Pages:** Standard ASCII; Epson® Character Set I & II; IBM® Character Set I, II & All; International Character Sets including BRASCI & ABICOMP; Line/Block Graphics

**Bar Codes:** UPC-A, UPC-E, EAN 8, EAN 13, Interleaved 2 of 5, Code 39, Code 128 (A, B, C), PostNet™

**Paper Handling**

**Paper Input:** Continuous: single-part/multi-part; card stock; envelopes; labels

**Number of Copies:** Interleaf = 7; Carbonless = 10

**Maximum Thickness:** 0.014" (0.36 mm) Rear Feed; 0.031" (0.78 mm) Bottom Feed

**Paper Feeding:** Rear Push and Bottom Push standard

**Tear Capabilities:** Zero tear (Menu-selectable); Metal tear bar

**Loading:** Auto loading, Auto paper park, Autogapping, Straight paper path (front), Software-selectable front/rear paper paths

**Sensors:** Paper out, paper input, Paper motion/jam detection, Paper width, Paper selected

**Warranty and Reliability**

**Limited Warranty:** 2-year On-site on printer (parts & labor)<sup>1</sup>; 1-year On-site on printhead (parts & labor)<sup>1</sup>

**MTBF:** 15,000 hours (25% duty cycle/35% page density)

**Printhead Life:** 400 Million characters avg. in 10 cpi Utility mode (25% duty, 35% page density)

**Environmental**

**Size (WxDxH):** 29.5" x 14.9" x 14.1"  
(74.9 cm x 37.8 cm x 35.8 cm)

**Net Weight:** 92 lb. (41.7 kg)

**Maximum Noise:** 61 dBA (Utility), 55 dBA (Utility-Quiet)

**Ordering Information (Part Number)**

<b>Printer:</b>	PACEMARK 4410 – 110V–230V	61800901
	PACEMARK 4410 – 110V–230V (factory-configured with OkiLAN® 6100e)	61801001
<b>Supplies:</b>	Ribbon cartridge – Nylon fabric; 15 Million character life	40629302
<b>Accessories:</b>	OkiLAN 6100e Internal Network Print Server	70034201
	OkiLAN® 6010e External Network Print Server	70034401
	Printer Stand (call Balt Inc. directly at 800-749-2258)	OKI-PM4410

<sup>1</sup> Available in the U.S. and Canada only.

All specifications subject to change without notice.

© 1999 Okidata, a Division of Oki America, Inc. OKI, MICROLINE, OkiLAN, Reg. T.M., M.D., People to People Technology and design T.M., Oki Electric Industry Co., Ltd. PACEMARK Reg. T.M., 7-Day/24-Hour logo T.M., Oki America, Inc. Centronics Reg. T.M. Centronics Data Computer Corp. Epson, Reg. T.M., Seiko Epson Corp. IBM, OS/2, ProPrinter Reg. T.M., International Business Machines Corp. Windows, Windows NT, MS-DOS, LAN Manager Reg. T.M., Microsoft Corp. UNIX Reg. T.M., Santa Cruz Operation (SCO). PostNet logo, T.M., USPS. Energy Star Reg. T.M., U.S. EPA. Novell, NetWare, YES Tested and Approved logo Reg. T.M., Novell, Inc. Ethernet Reg. T.M., Digital Equipment Corp., Intel and Xerox Corp. Printed in the U.S.

MS10249/0299

